

FIG. 1

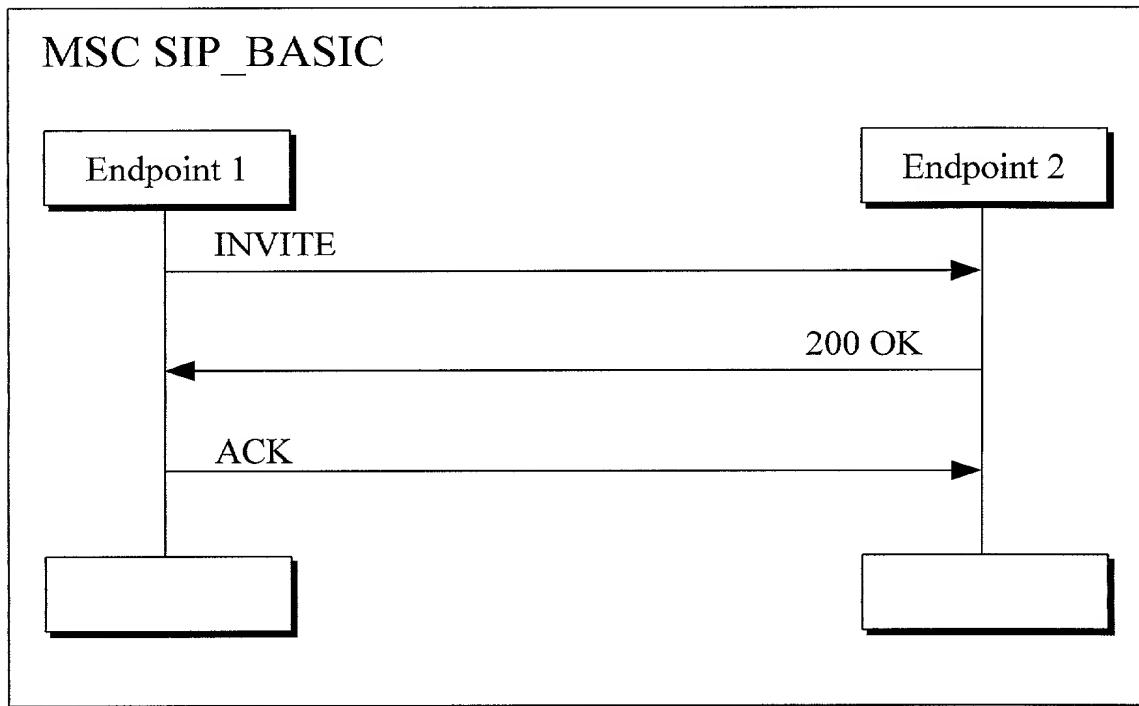


FIG. 2

MSC SIP PROXY

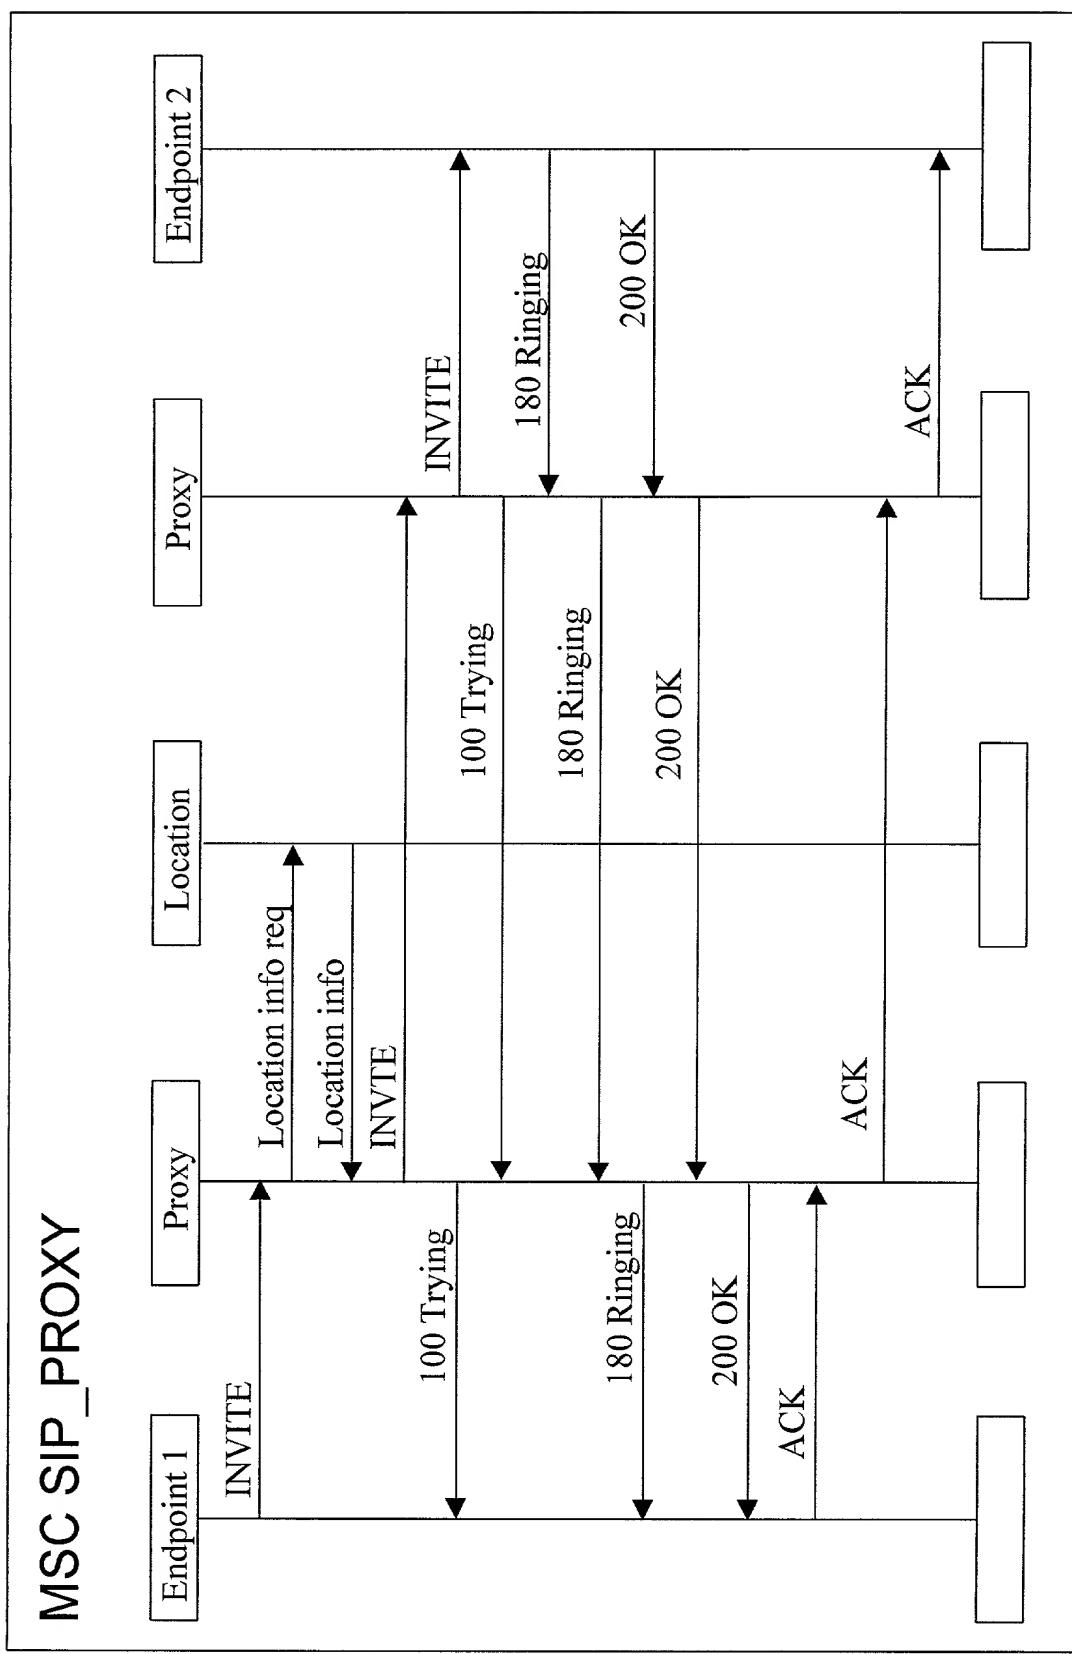
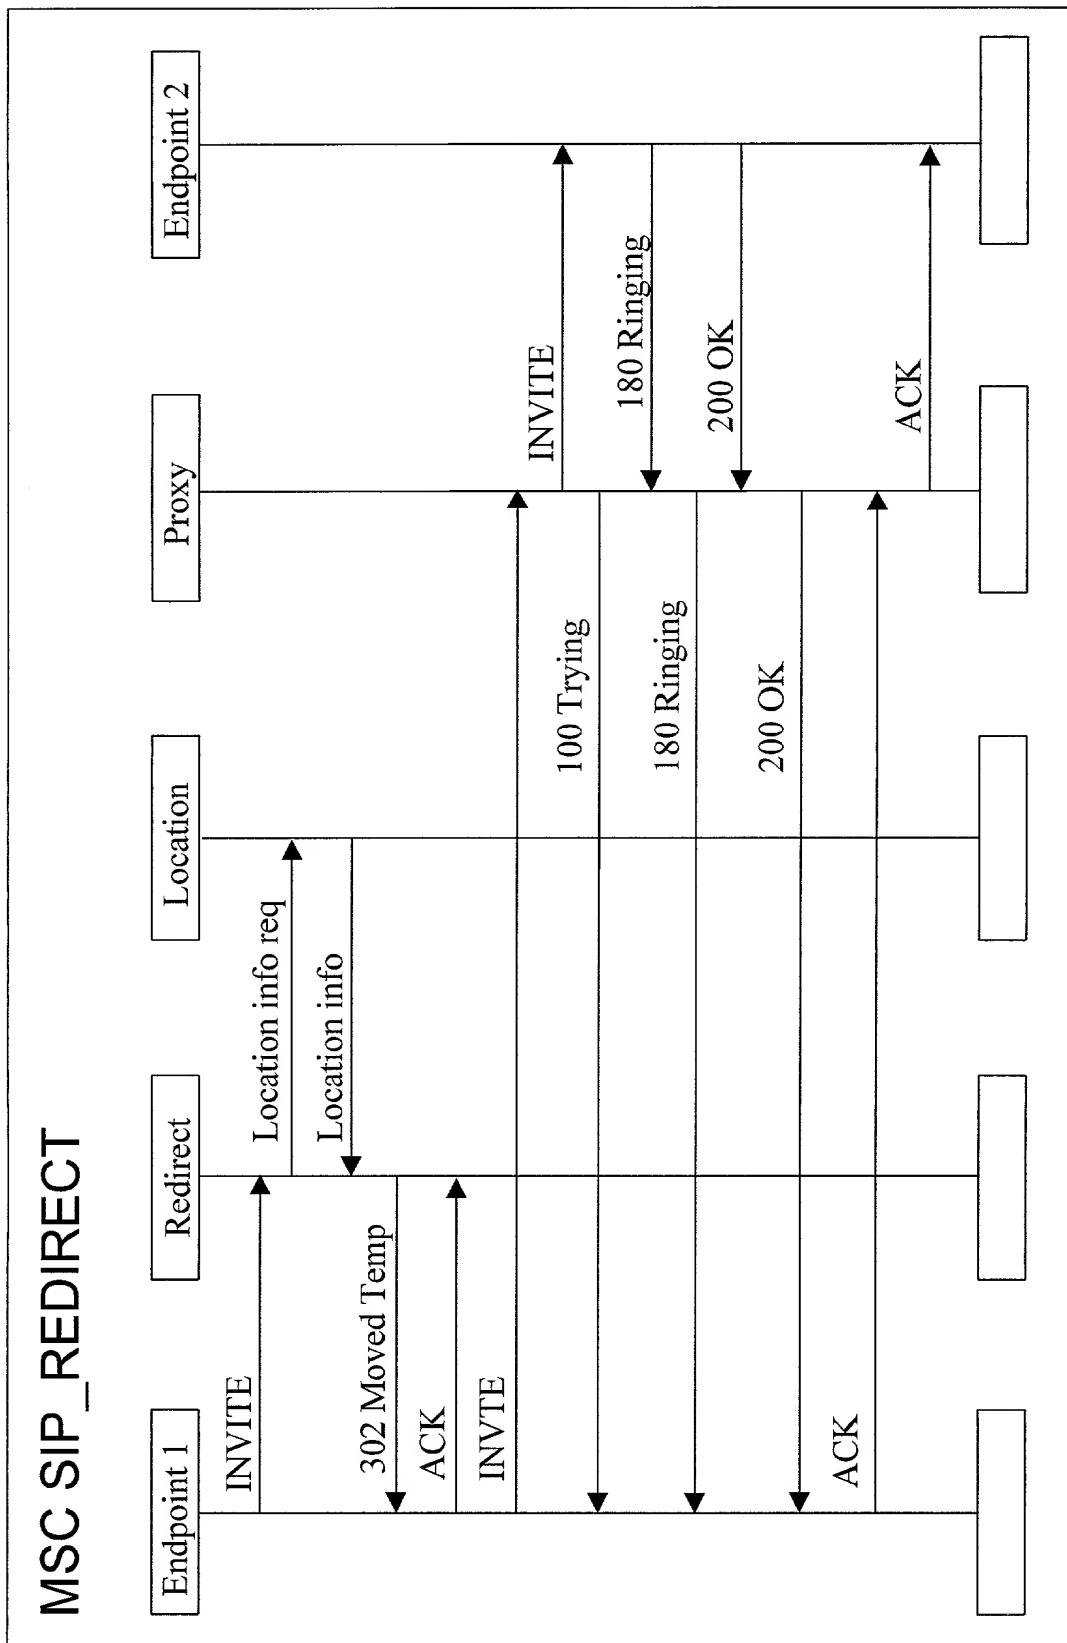
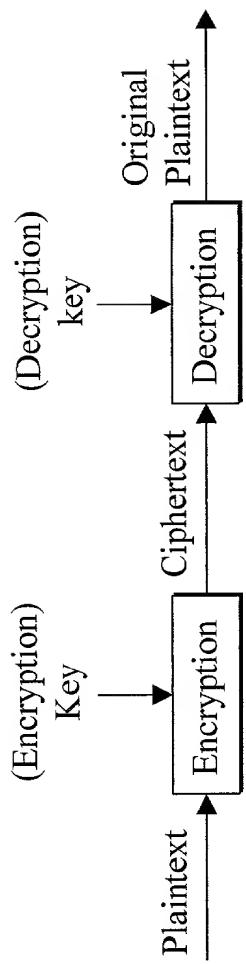
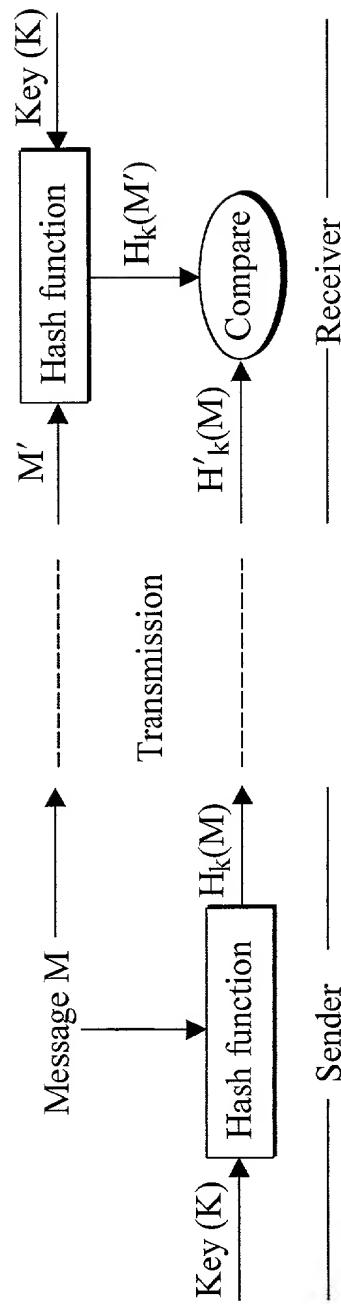
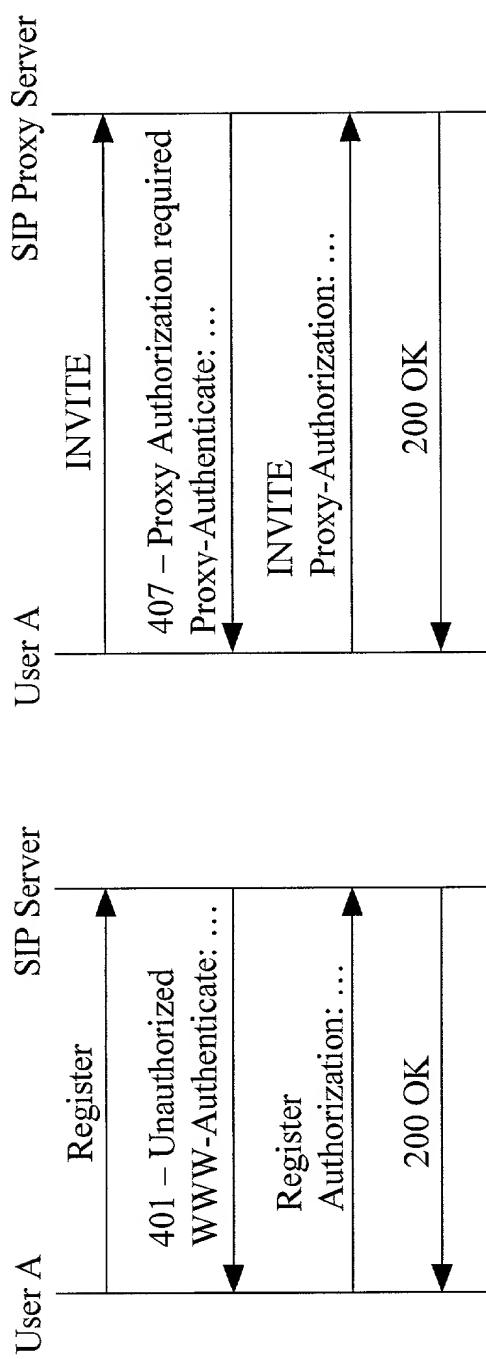
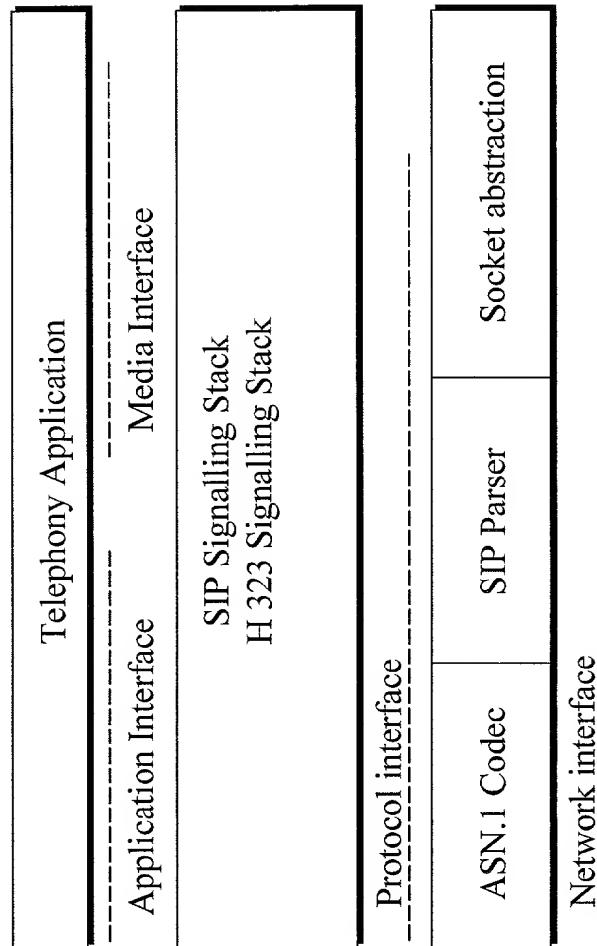
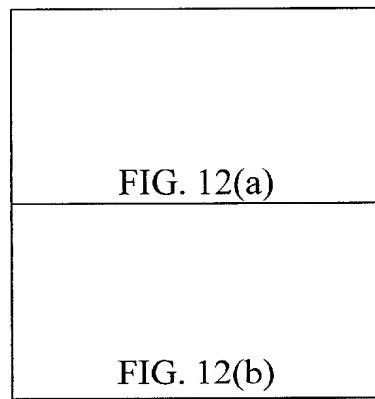
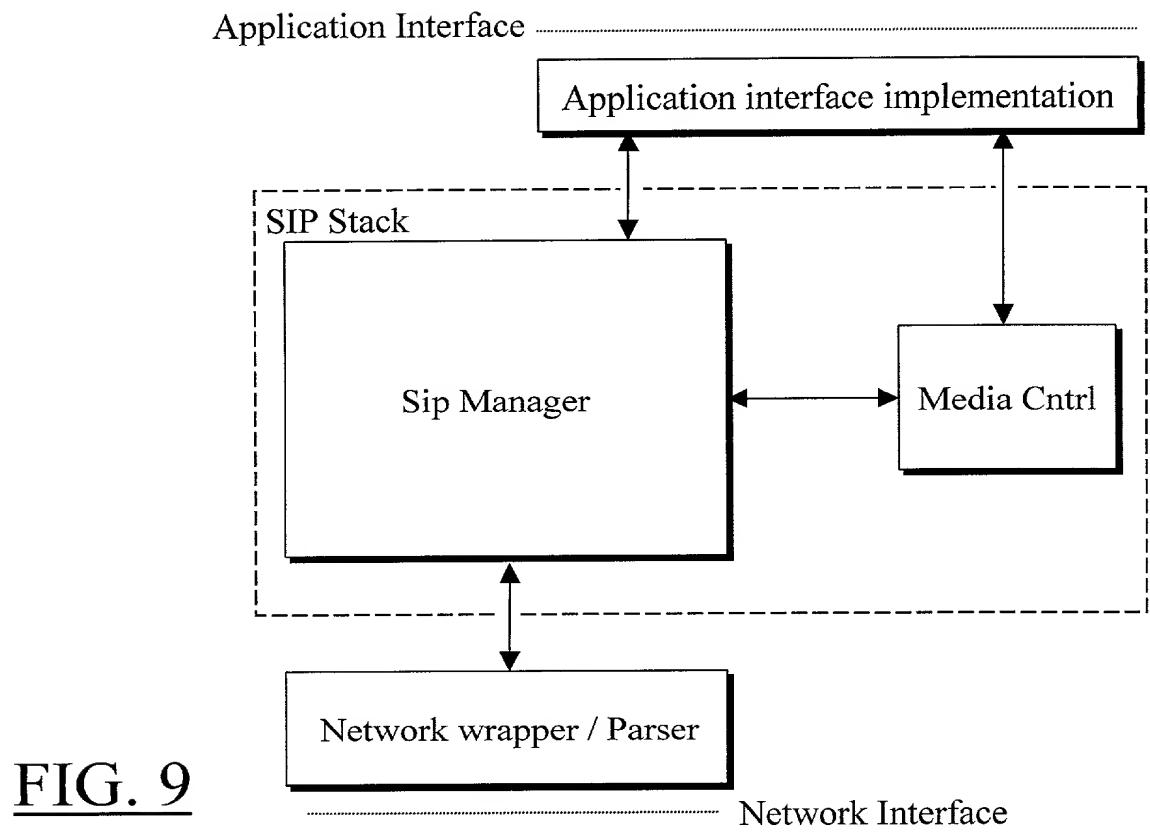
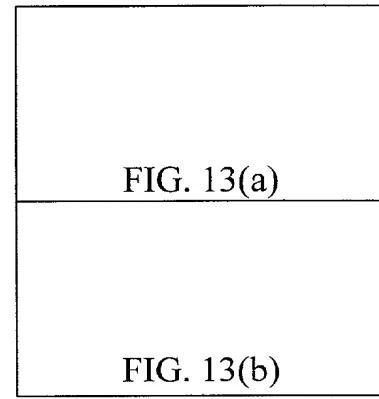



FIG. 3

**FIG. 4**

**FIG. 5****FIG. 6**

FIG. 7FIG. 8

**FIG. 12****FIG. 13**

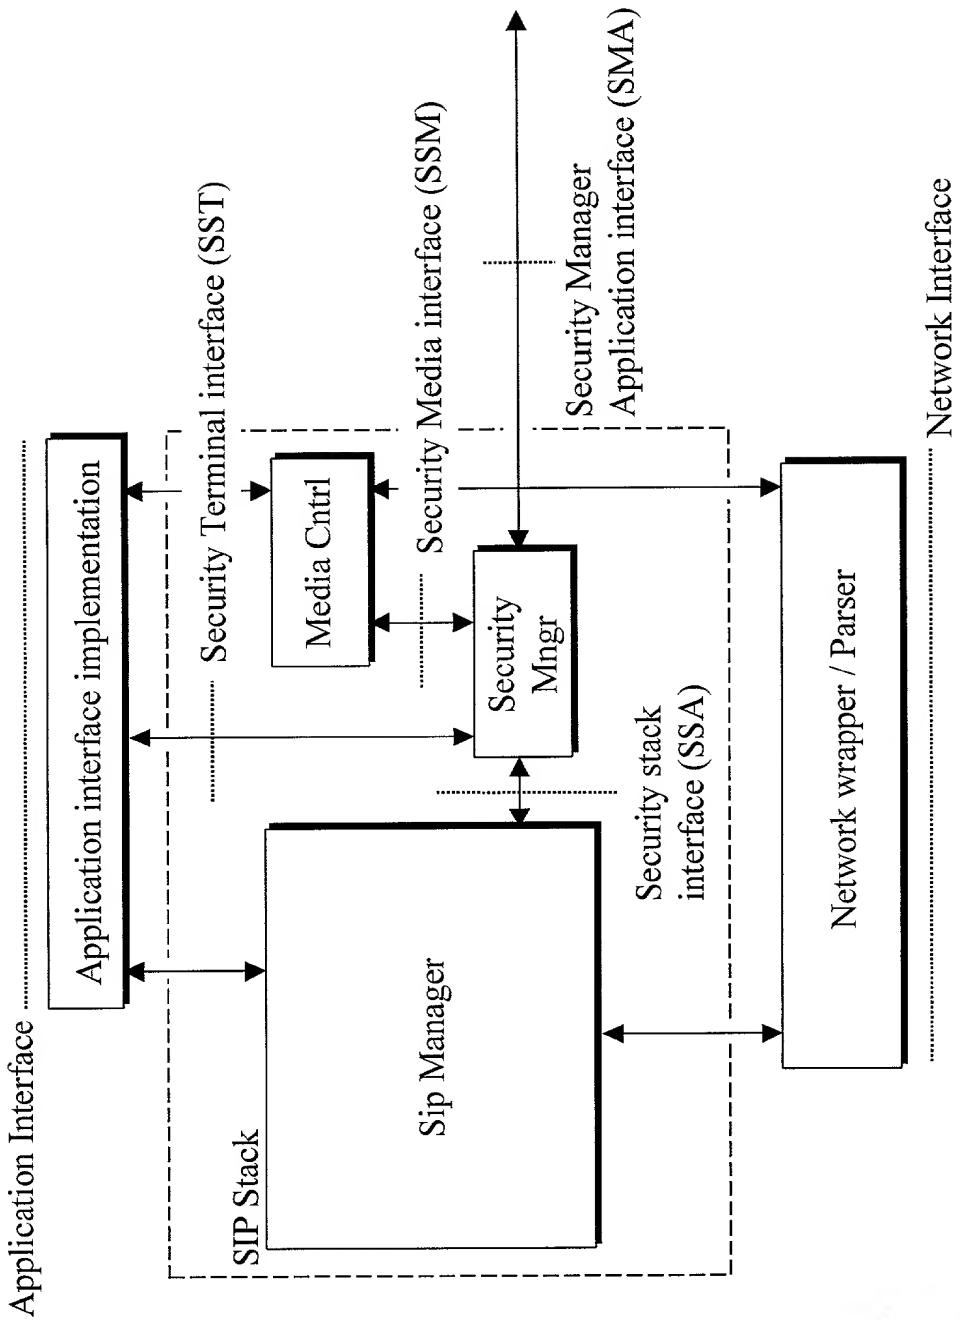FIG. 10

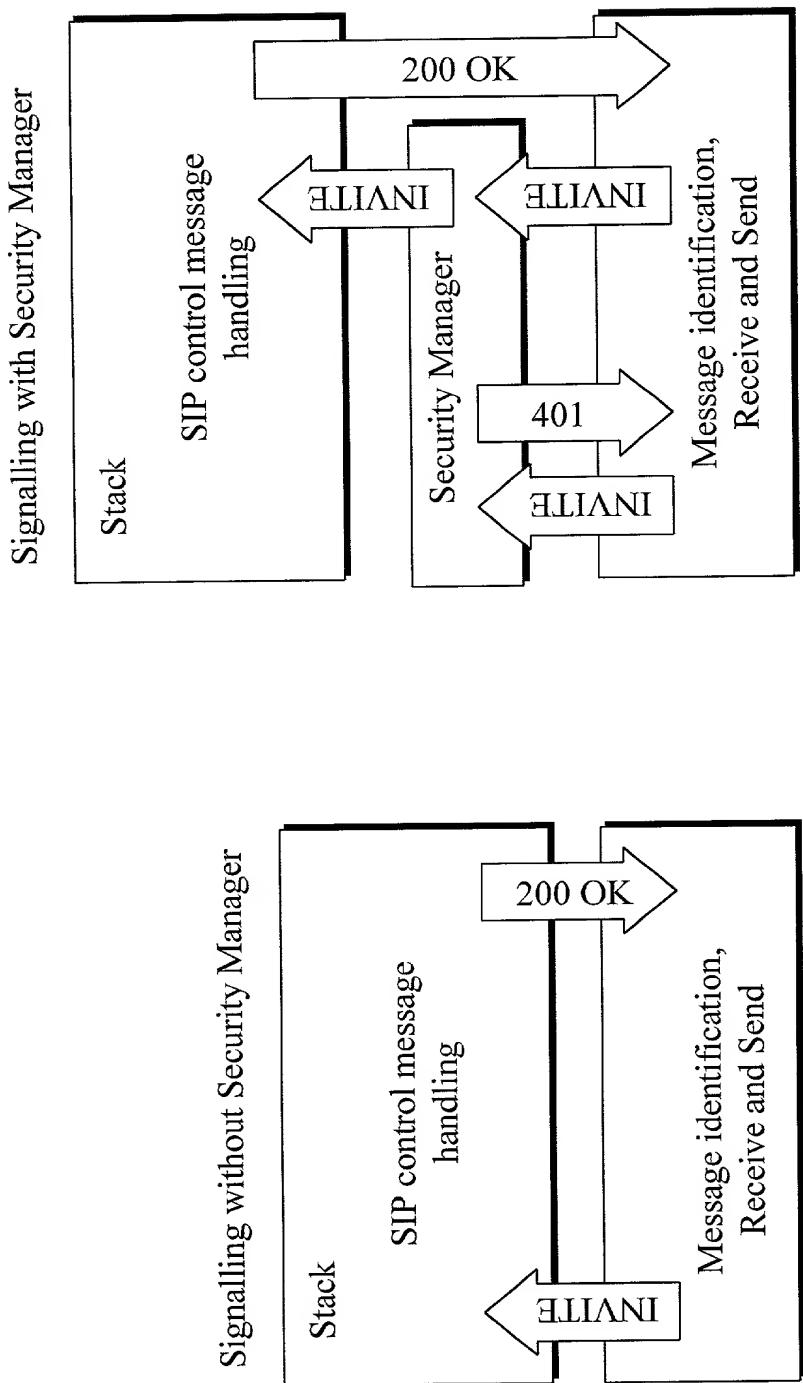
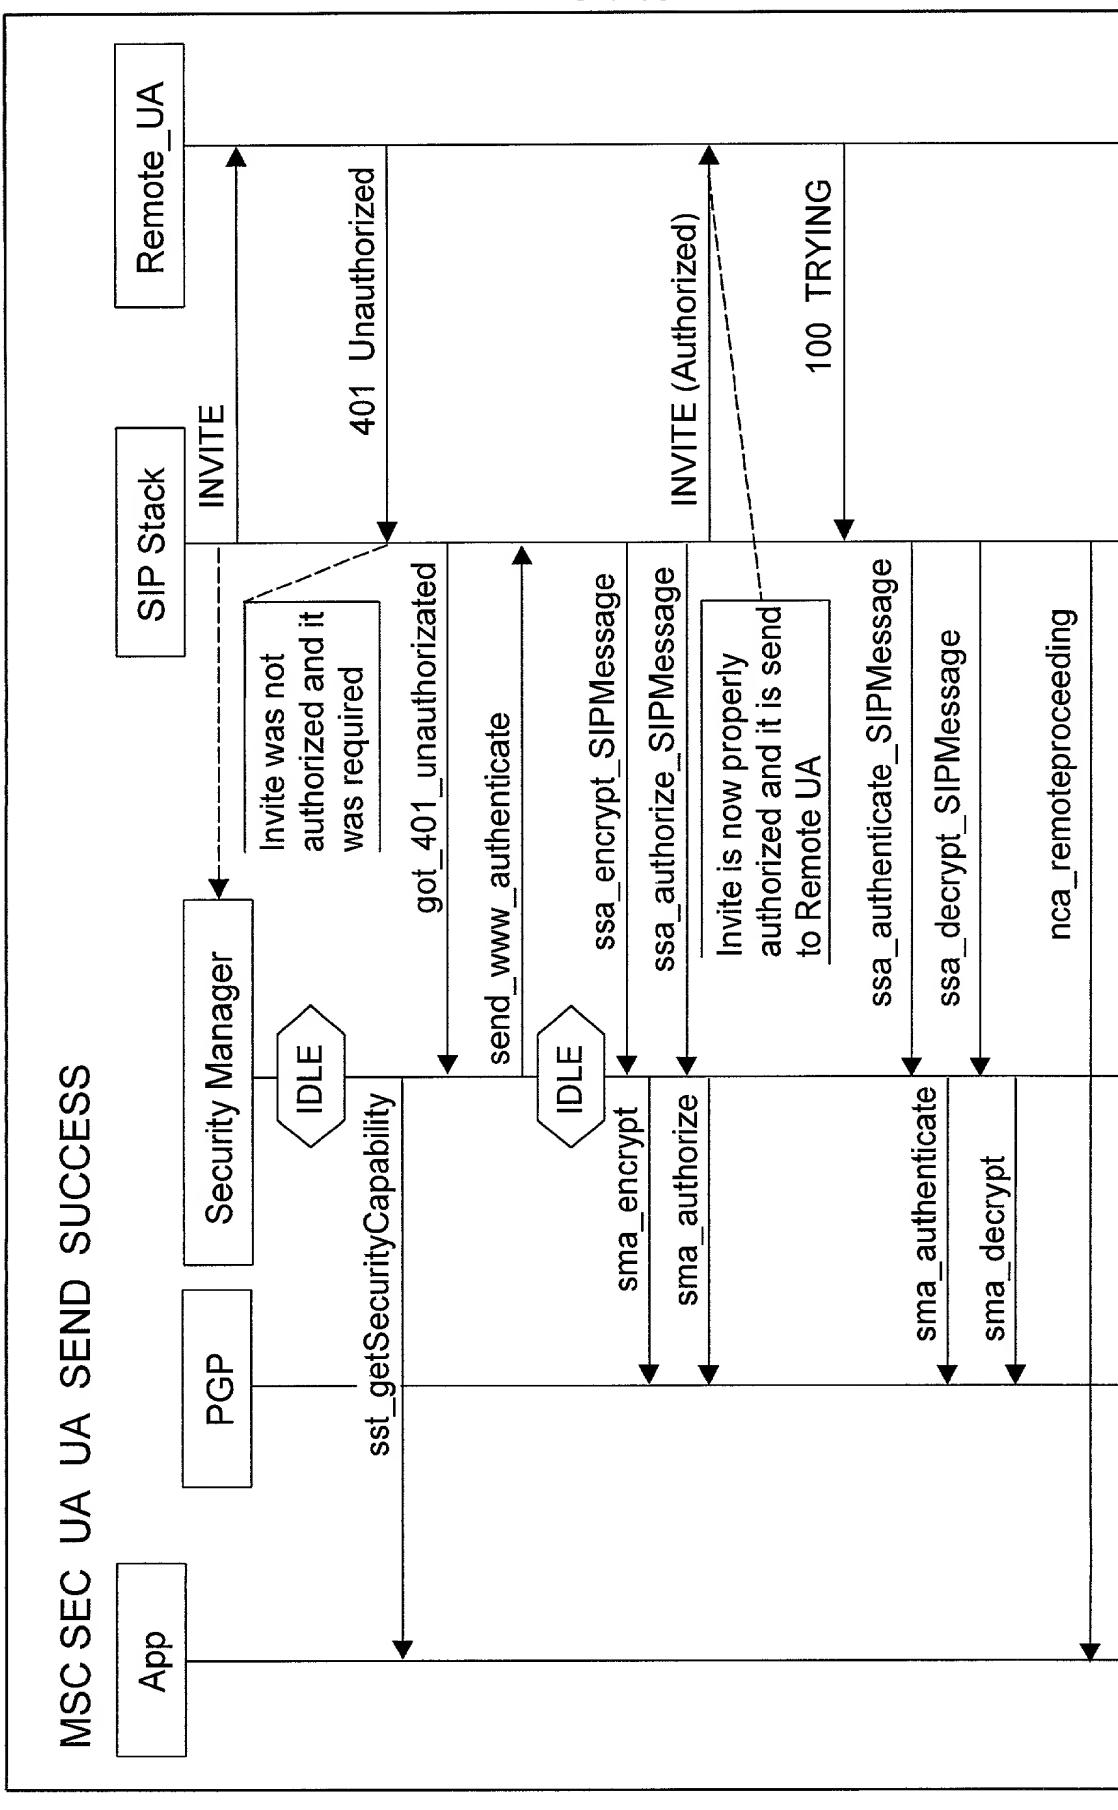


FIG. 11

**FIG. 12(a)**

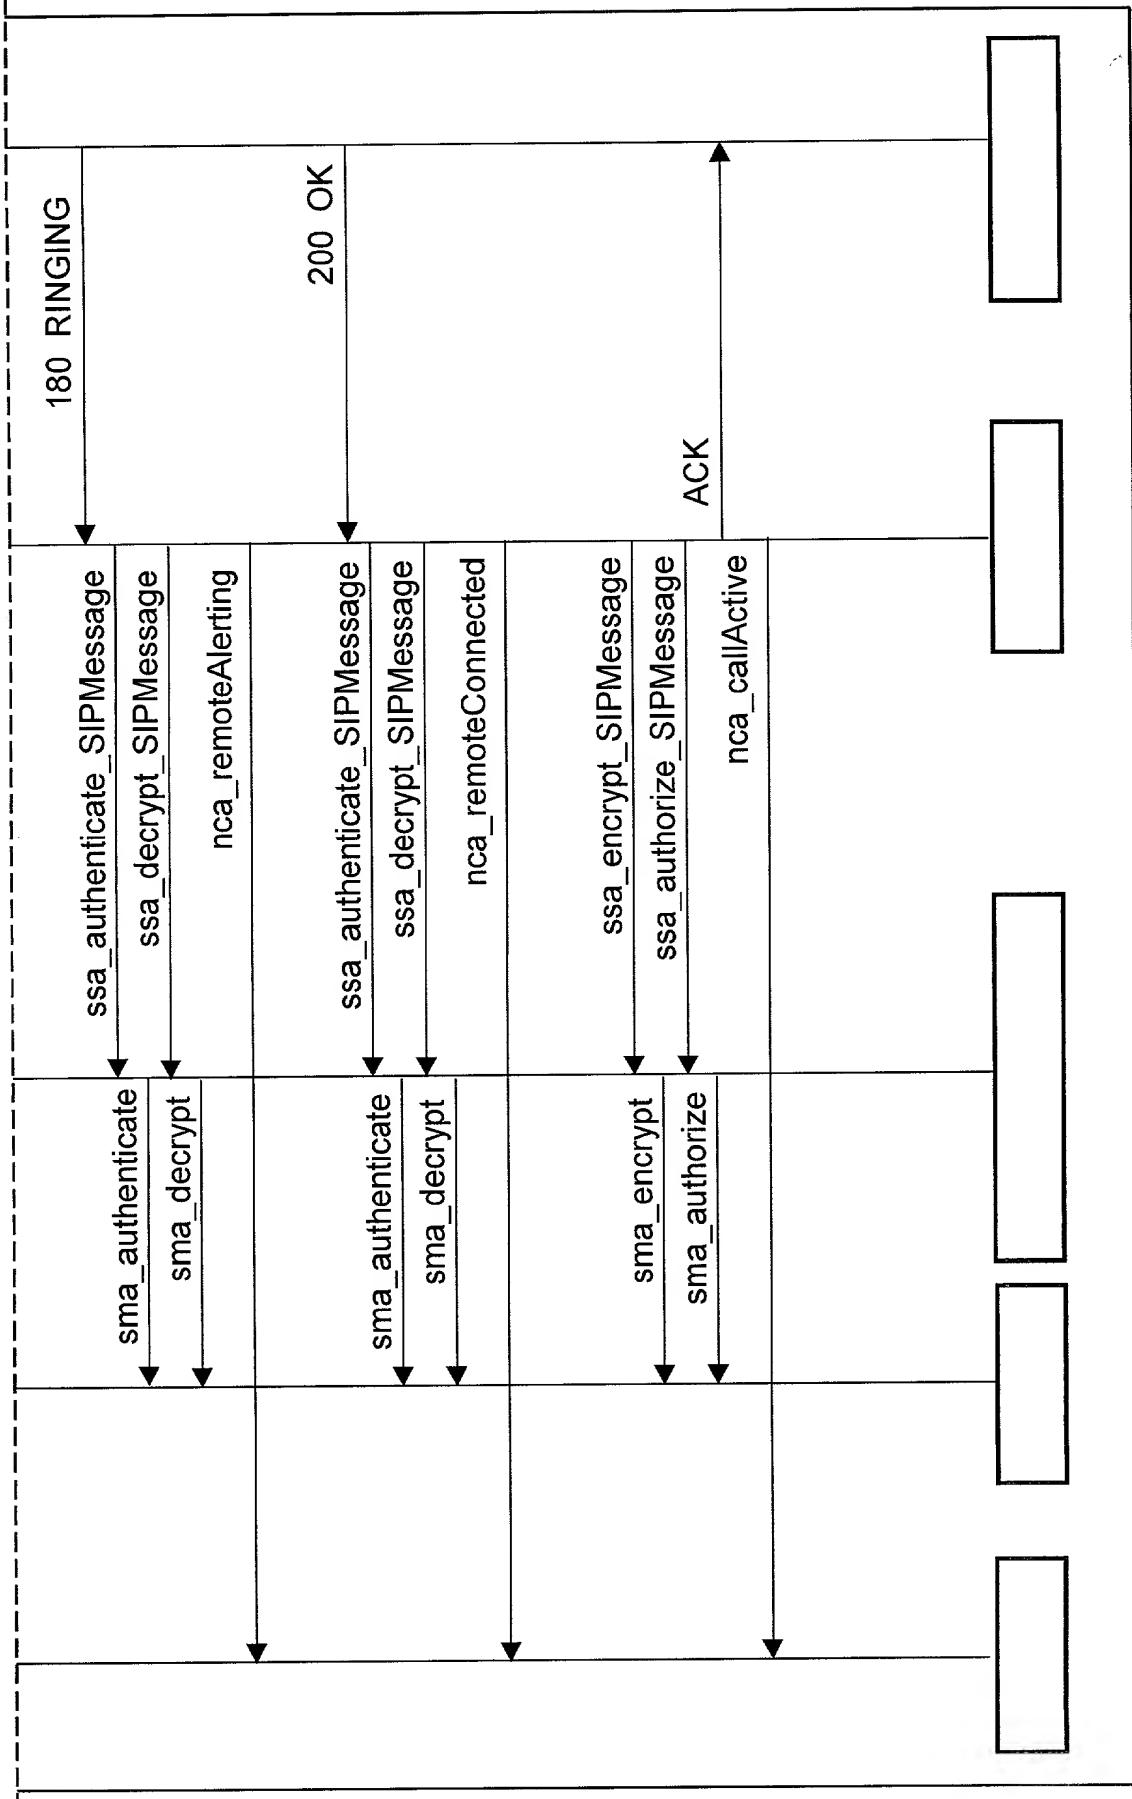
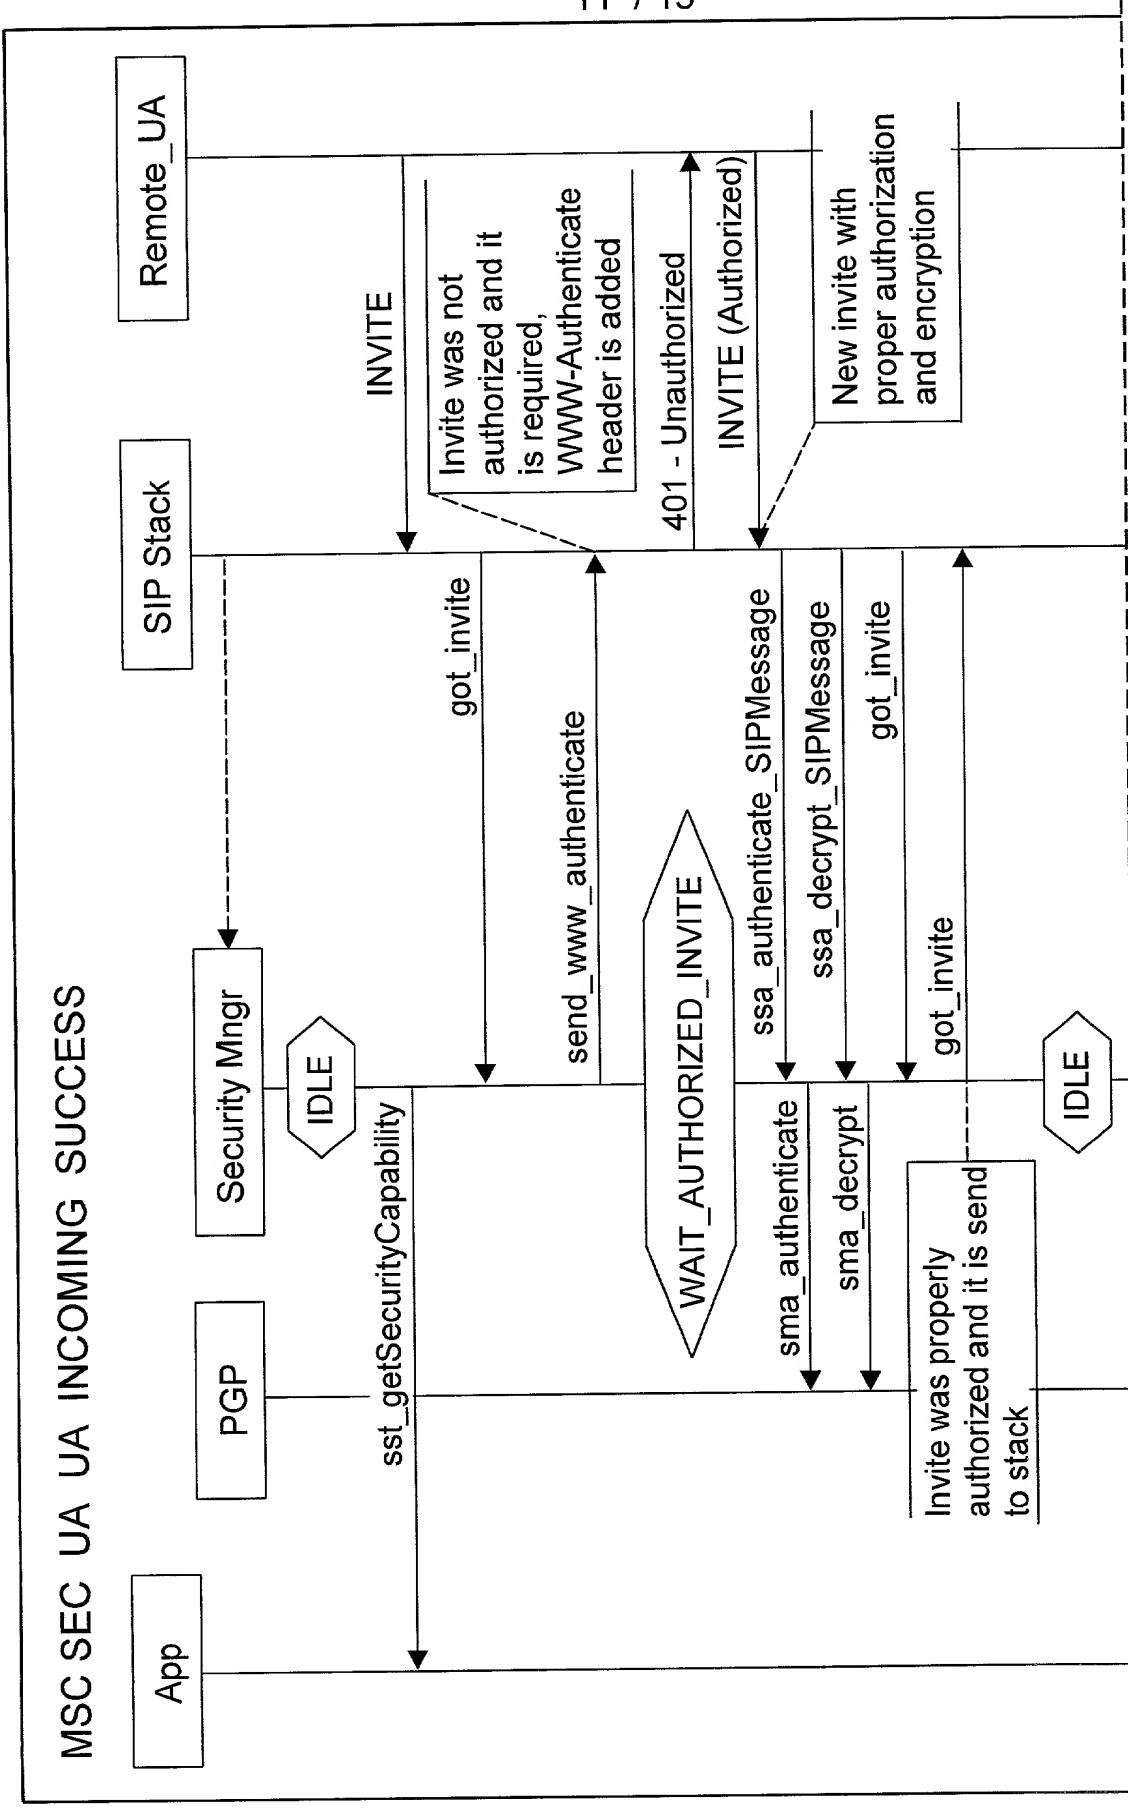


FIG. 12(b)

**FIG. 13(a)**

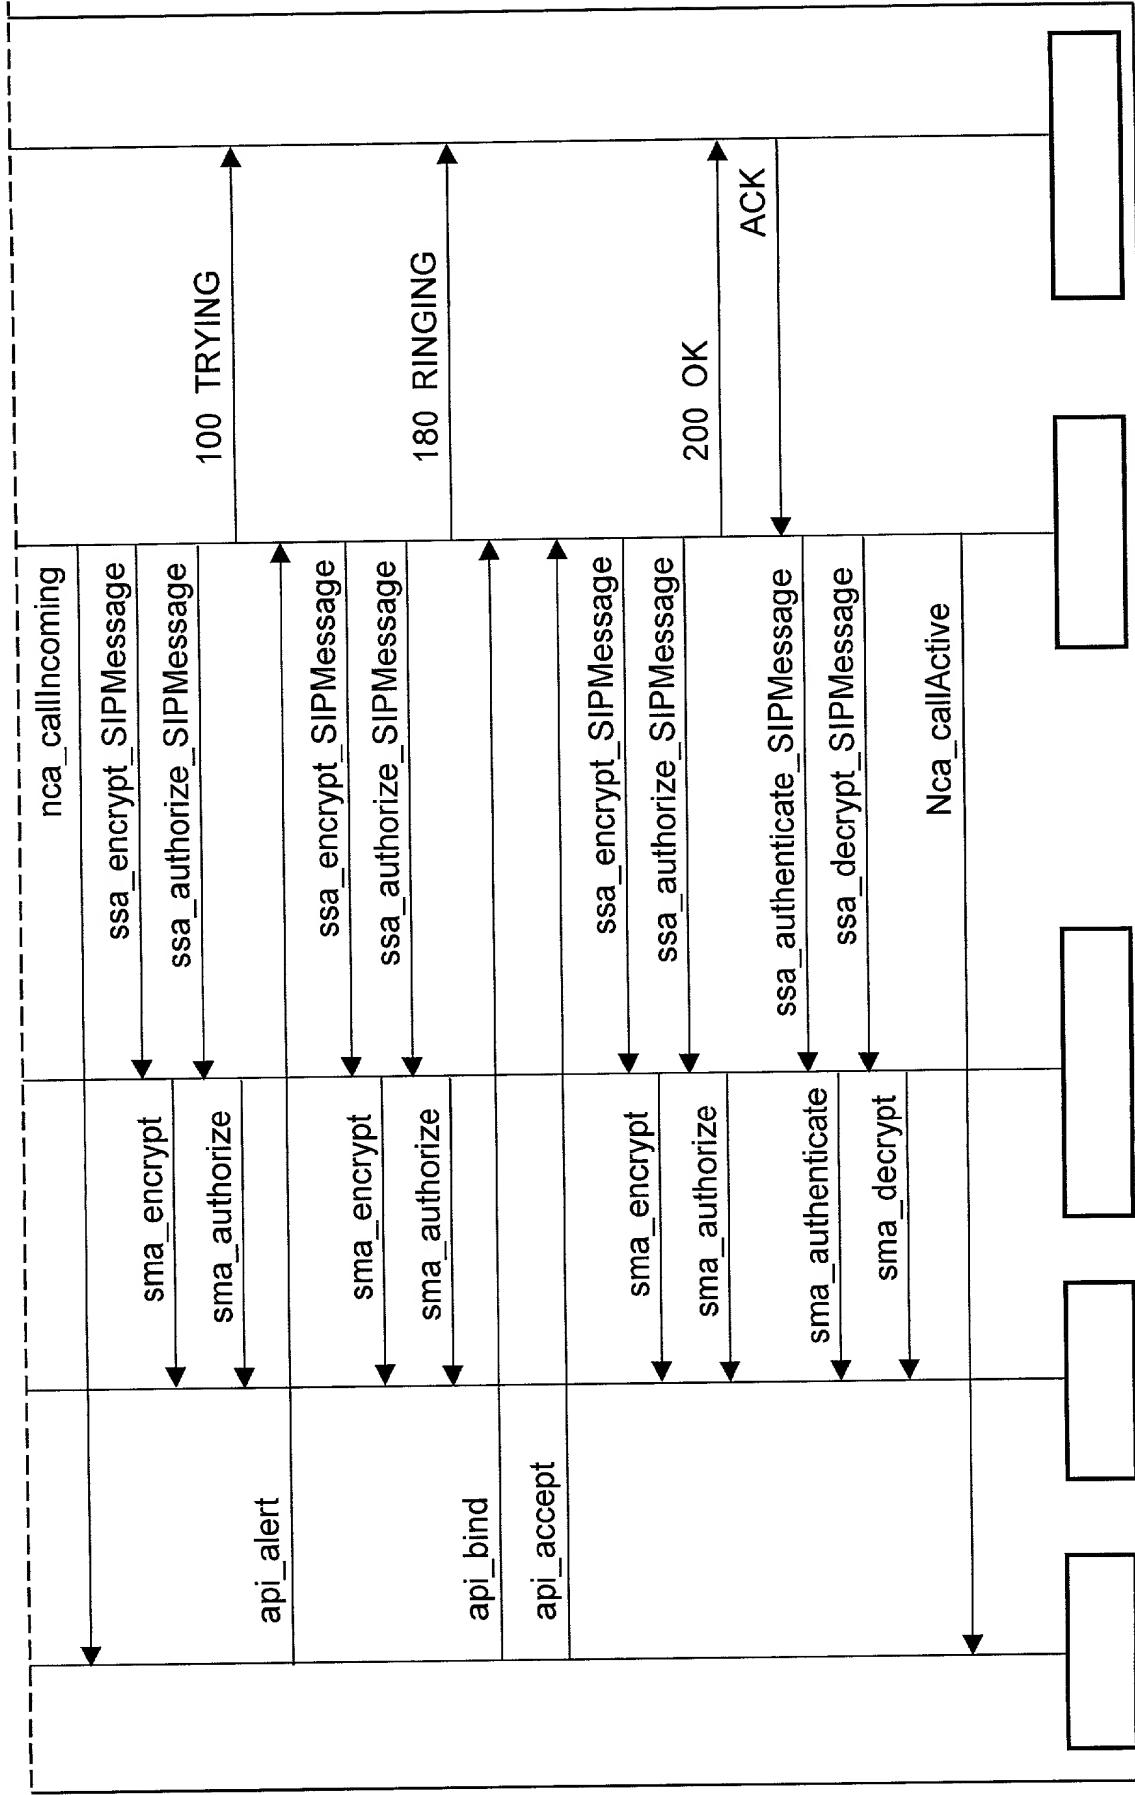



FIG. 13(b)

Security Manager

1(3)

Receiving terminal

Security Manager receives an invite. The security parameters are checked and new invite is requested.



TASK_SecurityManager_invite

TASK_SecurityManager_send_www_auth

send_www_auth

wait_auth_invite

FIG. 14(a)

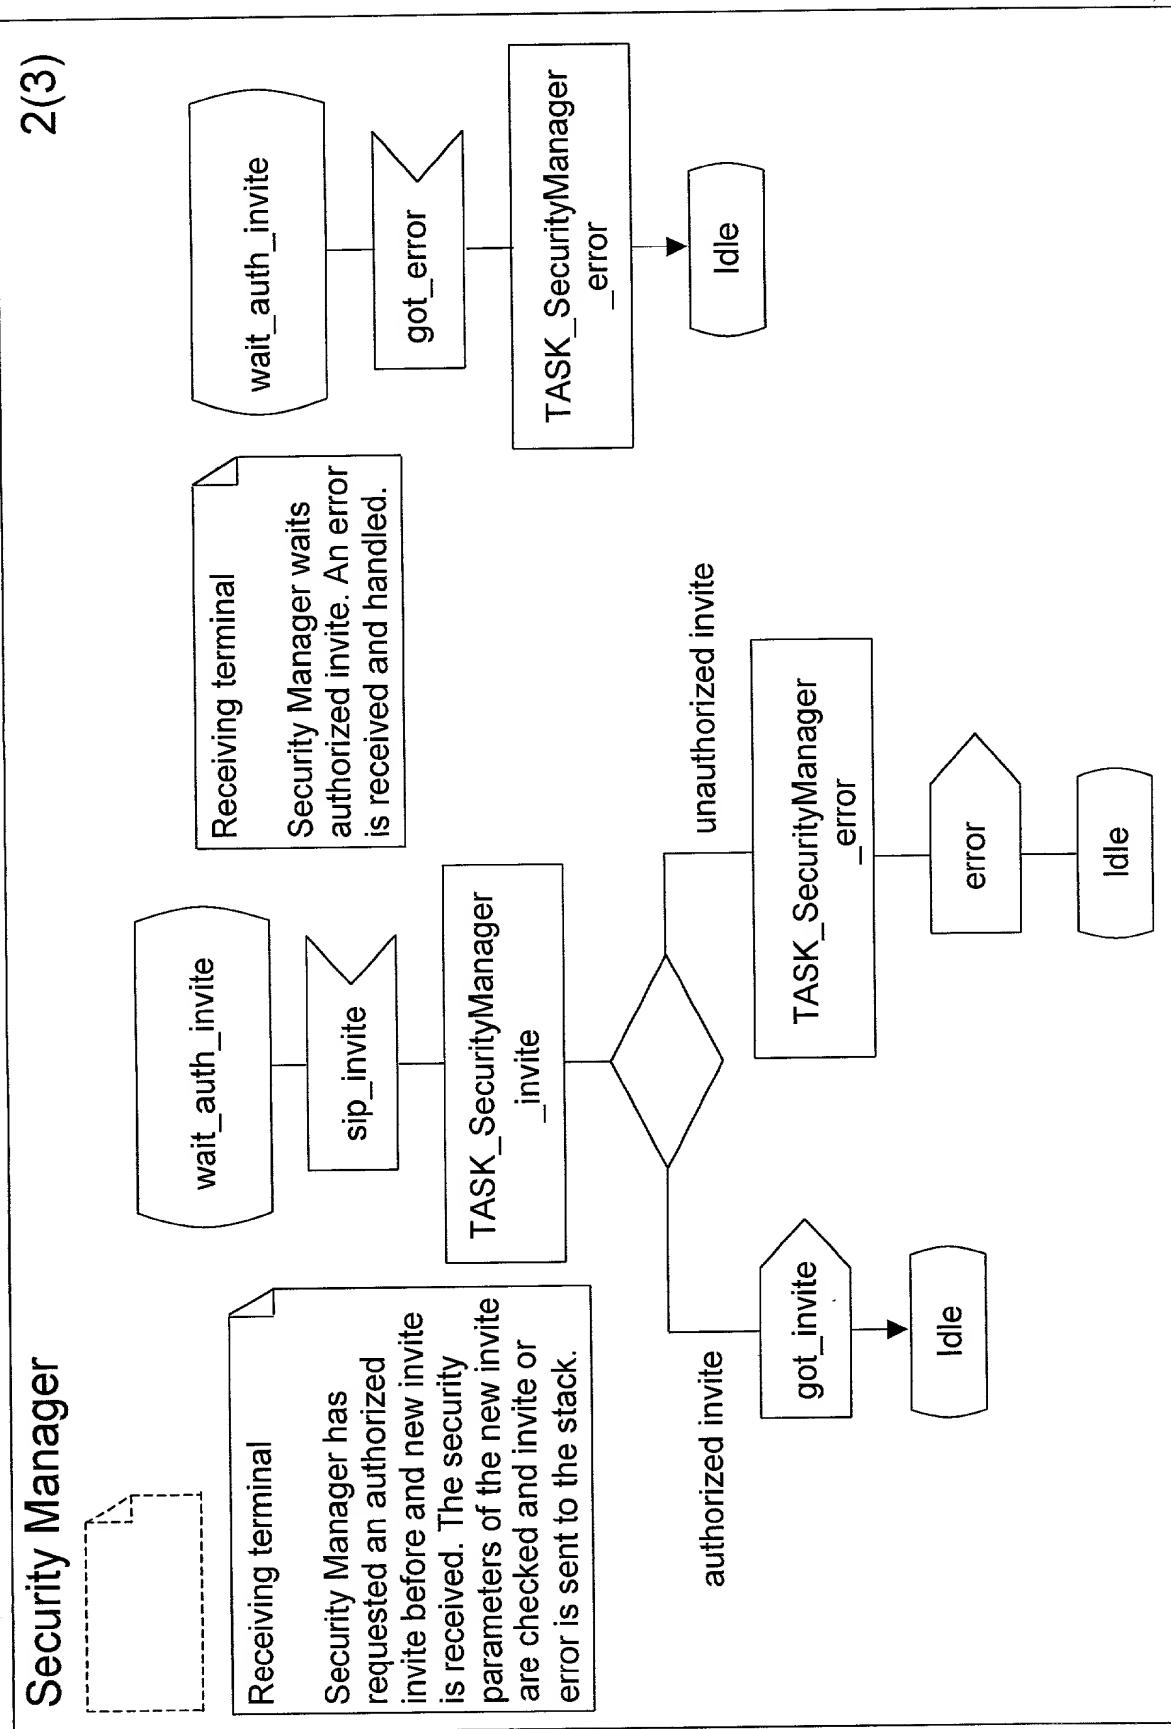


FIG. 14(b)

Security Manager

3(3)



Sending terminal

The terminal has sent an invite and received 401 Unauthorized response. It makes new authorized invite messages and sends it.

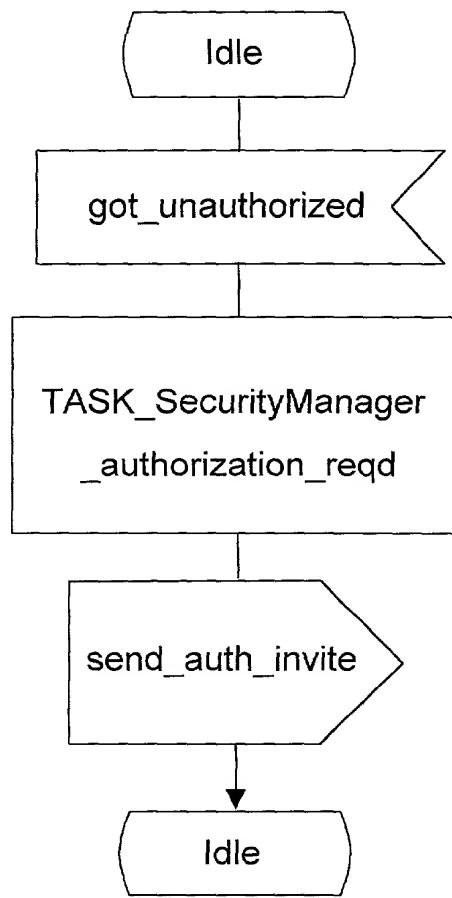


FIG. 14(c)